

9100QC In-Cab Meter

Highly Accurate, Reliable and Easy to Operate



The 9100QC in-cab meter is capable of displaying individual weights, for channel and total weights. The 9100QC is a highly accurate, reliable and easy to operate meter. It has full digital panel configuration, setup, zero & span calibration capabilities. Other features include full RFI/EMI filtering and a communications port allowing connection to an optional printer.

9100QC In-Cab Meter - 8500550-0

Key Features:

- Easy to operate - Up to 4 channel programs
- Extensive self diagnostic
- Easy two-step calibration
- Post calibration
- RS232 communication port
- Weight set-alarm points
- Supervisor lock-out
- Bright, dependable, easy to read LED display

Options:

- Printer
- Relay board
- Hand held remote

Applications:


- Bulk hauling
- Forestry
- Aggregate
- Agriculture
- Dump trucks & trailers

5920 South 194th Street | Kent, WA 98032 | USA
Sales Support: 800-638-5111 | Technical Support: 626-202-5047
E-mail: Obw.usa@vpgsensors.com

sionboard.com



9100QC In-Cab Meter - 8500550-01

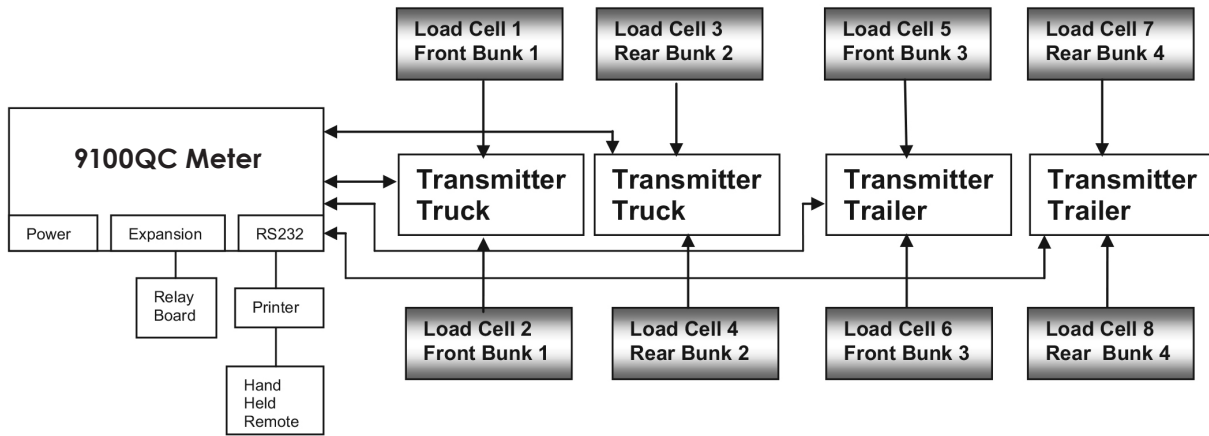

Specifications

PARAMETERS	DESCRIPTION
Digit size	.45"
Number of digits	6
Screen type	LED
Size	6.5" K x 3.2" W x 1.9" D; 2.1 lbs
Divisions	20, 50, 100 (pounds or KG)
Meter operating voltage	11.5 to 16 Vdc @ 400mA
Meter operating temperature	10 °F to 104 °F
Conversion (Frequency to digital)	2 updates/second; approx. 4,000 display counts
Communications	RS232
Memory	64 byte ROM for operating system and programs
Number of channels	1 to 4

DISCLAIMER: ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE. Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein. VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.** Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com. No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG. The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications. Product names and markings noted herein may be trademarks of their respective owners.